

PSEN mg1-A-LLXXX-FBA1-S1-D switch

6M000003



Safety gate system PSENmgate, with operation elements, 2 illuminated pushbuttons (1 NO each), coded, with automatic reset, safety switch for front entry, 12-pin M12 male connector, cable outlet downwards, single connection

Technical details

General data

Approval:	CE, cULus Listed, FCC, IC, EAC (Eurasian), TÜV
Sensor principle:	Transponder
Coding level to ISO 14119:	Low
Classification to EN 60947-5-3:	PDDB
Transponder coding:	coded
Reset type:	Automatic reset
Suitable for series connection:	no
unit type:	Sensor

Technical data

Electrical data

Supply voltage (V):	24 - 24 V
Type of supply voltage U1:	DC
Power consumption DC:	1 W

Inputs

Number of inputs:	5
DC voltage at input:	24 V DC

Push button

Number, pushbutton:	2
Switch cap. p/b to standard:	EN 60947-5-1

Contact material pushbutton:	Ag
Semiconductor outputs	
Number of OSSD outputs:	2
Number of sig. outputs:	1
Potential isolation S/C O:	No
S/C output short circuit proof:	Yes
Utilisation cat. to EN 60947-1:	DC-13
Button	
Contact material button:	AgNi
Switch cap. button to standard:	EN 60947-5-1
Environmental data	
Ambient temperature standard:	EN 60068-2-14
Ambient temperature:	0 - 55 °C
Storage temperature standard:	EN 60068-2-1/-2
Climatic suitability standard:	EN 60068-2-78
Humidity rating:	93 % r. h. at 40 °C
Perm. operating height ASL:	2000 m
EMC to standard ...:	EN 55011: Class A, EN 60947-5-3, EN 61326-3-1
Vibration to standard ...:	EN 60068-2-6
Acc. shock to standard1:	30g
Overvoltage category:	III
Pollution degree clear.&creep.:	3
Protection type, housing:	IP65
Times	
Pulse length lock/unlock req.:	350 - 400 ms
Mechanical data	
Escape release available:	No
Type 1 actuator:	PSEN ml 1.1
Sensor can be flush-mounted:	No

Connection type:	M12, 12-pin male
Cable lines:	LiYY 12 x 0.25 mm ²
Product material:	Zn, Aluminium, Galvanised steel, Stainless steel, Plastic
Housing material upper part:	Plastic
Height dimension:	237.5 mm
Width dimension:	40 mm
Depth dimension:	65 mm
Net weight:	1020 g
Gross weight:	1489 g
Transponder	
Operating frequency:	122 kHz - 128 kHz
Environment	
WEEE classification (08/2018):	5 devices (feed size < 50cm)
Commercial data	
ECLASS version:	ECLASS-13
ECLASS Reference Feature:	27272603
ETIM Version:	ETIM-9.0
ETIM Reference Group:	EG000026
ETIM Reference Feature:	EC002593

Optional accessories



570350

PSEN cable M12-12sf 2m



570351

PSEN cable M12-12sf 3m



570352

PSEN cable M12-12sf 5m



570353

PSEN cable M12-12sf 10m



570354

PSEN cable M12-12sf 20m



570355

PSEN cable M12-12sf 30m



570356

PSEN cable M12-12sf 50m



570460

PSEN ml escape release



570461

PSEN ml auxiliary release hd1





570462

PSEN ml escape release extension



570468

PSEN ml escape release cordset 1,0m

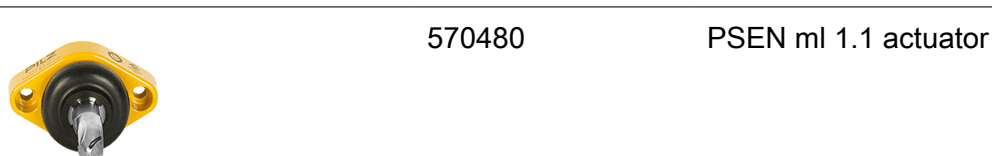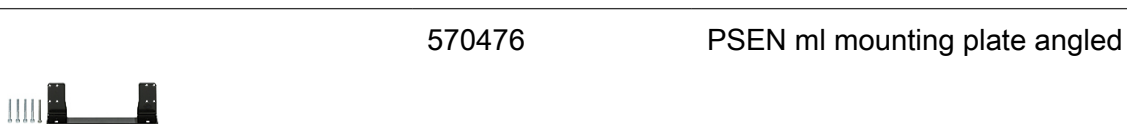



570482

PSEN ml 1.1 round actuator



570484

PSEN ml actuator 10° adapter



570485

PSEN ml actuator center ring



570490

PSEN ml mounting plate



570498

PSEN screw set bracket swinging door

6M000049

PSEN mg bracket swinging door 70

6M000050

PSEN mg bracket swinging door 80

6M000051

PSEN mg door handle swinging door 70

6M000052

PSEN mg door handle swinging door 80



6O000013

PSEN ml DHM mounting plate



G1000009

PIT gb color covers
